
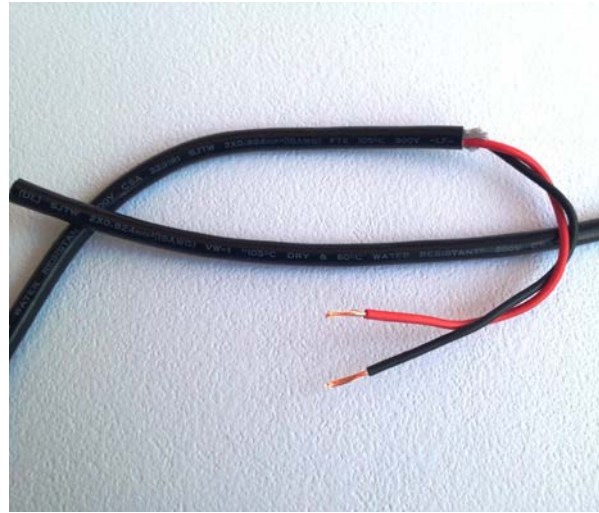


**J2 LED Lighting, LLC**  
www.j2ledlighting.com  
**Product Specification Sheet**  
**RBC (LED Driver Cable) Waterproof**

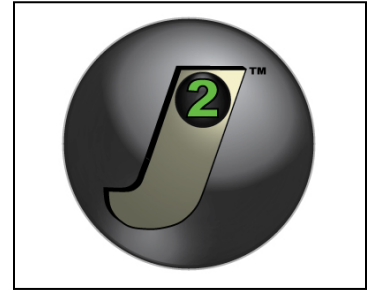

**Specifications:**

- Awg: 18 (2 PVC insulated conductors red and black), bare copper 41 strands
- Amp: 10 Max.
- Volts: 300 max. AC
- System volts: 12 – 24 Typical.
- Flammability: VW-1 UL & CSA / FT2 CSA
- Certifications: UL component (Cable is marked UL)
- Maximum operating temperature: 105C Dry / 60C Wet
- Composition: Rohs / Pb-Lead free
- Filler / separator: cotton based thread and paper

**SJTW Type:**

- **SJ** = Hard usage Flexible Cord (Trade Name = junior hard service cord)
- **T** = Thermoplastic insulation and jacket (PVC)
- **W** = Suitable for use in wet locations and sunlight resistant

**Dimensions:**

- O.D. of Jacket Insulation: 7.4mm Typical
- O.D. of inner conductor insulation: 2.8mm Typical

Intended for low voltage non-fixed, portable; power, lighting and solar panel applications. COO (Country of Origin) China

**J2 P/N: RBC-18AWG-SJTW (Cable, LED Driver)**  
**Waterproof 2 conductor Rev-A 4/05/13**