

J2 LED Lighting, LLC


[www.j2ledlighting.com](http://www.j2ledlighting.com)

Product Specification Sheet

Square Block Mount High Density Urethane

(Mounting of MEL Micro Effects Lights and EEL Enhanced Effects Lights)

P/N: *SBM-HDU*

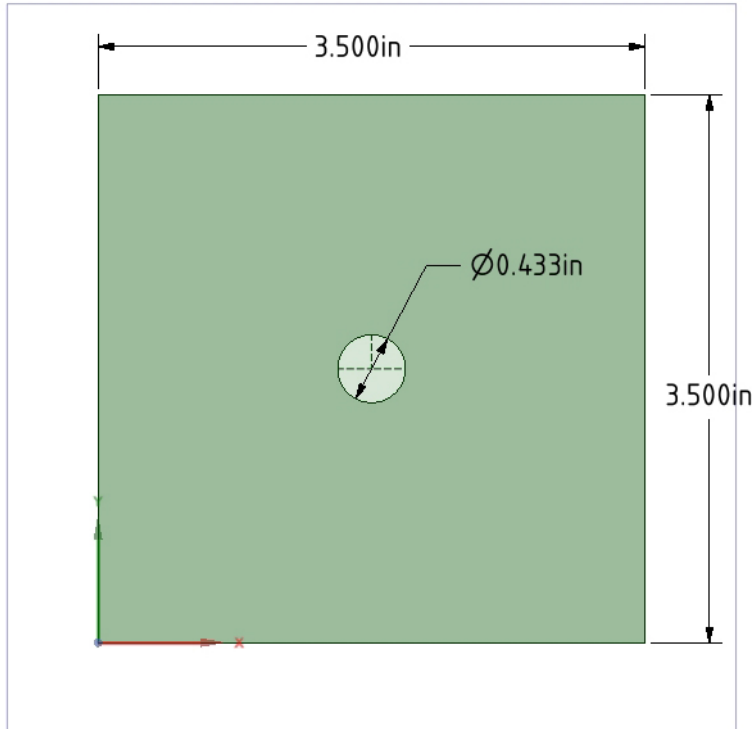

**Mechanical Characteristics and Notes:**

- 1) Material General Plastics Last-A-Foam® FR7106 Modeling foam 6lbs per cubic foot density.
- 2) Parts are water jet cut and non-painted, dimensions ref. only. Part thickness is 2" nominal.
- 3) For attaching the mount to a flat surface various means may be used; hot glue, urethane glues, Gaffer's tape, or screws.
- 4) J2 LED Lighting, LLC MEL (Micro Effects Lights) are recommended to be inserted rear (connector side) first on painted mounts to prevent chip out of paint around the hole.
- 5) Material can be shaped (sanded, drilled, and cut) with standard woodworking tools.