

Prop and Scenery Lights, LLC

[www.propscenerylights.com](http://www.propscenerylights.com)

Specification Sheet


RBC (Red Black Pair Cable)

Low Voltage Control and Power Interconnect

2 conductor 18 awg

P/N: RBC-18AWG-UL2464-25

UPC: 687077980017 (25 foot pack)

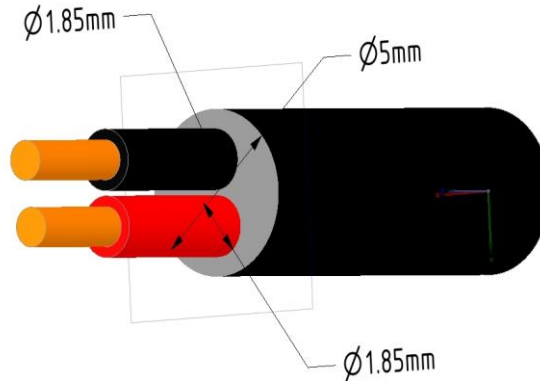

### Specifications:

- Awg: 18 (2 PVC insulated conductors red and black), bare copper 41 strands (18 AWG is printed on cable)
- Amp: 10 Max.
- Volts: 300 max. (300 V is printed on cable).
- System volts: 12 – 24 DC Typical.
- Jacket: Black PVC
- Flammability: VW-1 (VW-1 is printed on cable)
- Certifications: UL component (UL file number and UL mark is printed on cable).
- Maximum operating temperature: 80 °C Dry (80 °C is printed on cable)
- Composition: Rohs / Reach

### UL2464 (AWM 2464)

- Internal wiring or external interconnection of electronic equipment.

### Dimensions:

- O.D. of Jacket Insulation: 5.0mm +/-0.15mm
- O.D. of inner conductor insulation: 1.85 +/-0.05mm

COO (Country of Origin) China

Prop and Scenery Lights, LLC

P/N: RBC-18AWG-UL2464-25

Low Voltage Control and Power Interconnect

2 conductor Rev-B 07/29/17

Page 1 of 1