

Prop and Scenery Lights, LLC

www.propscenerylights.com


Specification Sheet

RBC (Red Black Pair Cable)

Low Voltage Control and Power Interconnect

2 conductor 18 Awg

P/N: RBC-18AWG-UL2464-USA

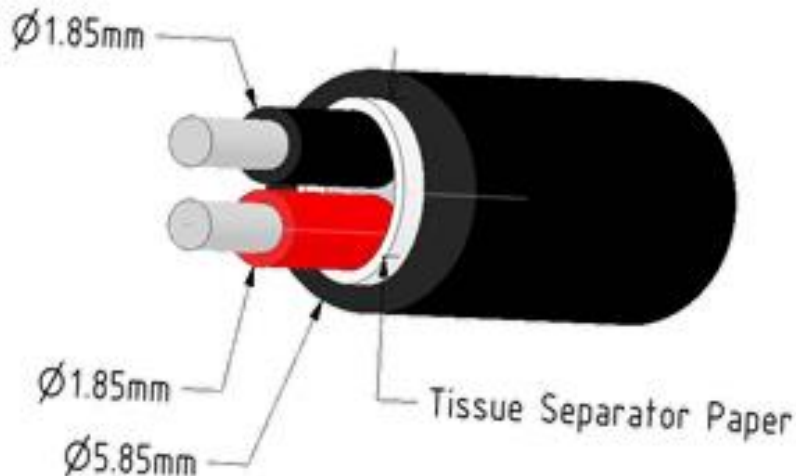

Specifications:

- Awg: 18 (2 PVC insulated conductors red and black), tin plated copper 41 strands (18 AWG is printed on cable)
- Amp: 10 Max.
- Volts: 300 max. (300 V is printed on cable).
- System volts: 12 – 24 DC Typical.
- Jacket: Black PVC
- Flammability: VW-1 (VW-1 is printed on cable)
- Certifications: UL component (UL file number and UL mark is printed on cable).
- Maximum operating temperature: 80 °C (176°F) Dry (80 °C is printed on cable)
- Composition: Rohs / Reach (Rohs Reach is printed on cable)
- COO, Country Of Origin: USA (Made In USA is printed on the cable)

UL2464 (AWM 2464)

- Internal wiring or external interconnection of electronic equipment.

Dimensions:

- O.D. of Jacket Insulation: 5.85mm +0.50mm / -0.25mm (0.230" +0.02" / -0.01")
- O.D. of inner conductor insulation: 1.85 +0.25mm / -0.05mm (0.073" +0.01" / -0.002")



Prop and Scenery Lights, LLC
P/N: RBC-18AWG-UL2464-USA
Low Voltage Control and Power Interconnect
2 conductor Rev-A 02/24/20 Page 1 of 1