


Prop and Scenery Lights, LLC
www.propscenerylights.com
Product Specification Sheet
Micro Effects Pigtail, LED Light
P/N: MEP-WW1 (Warm White)

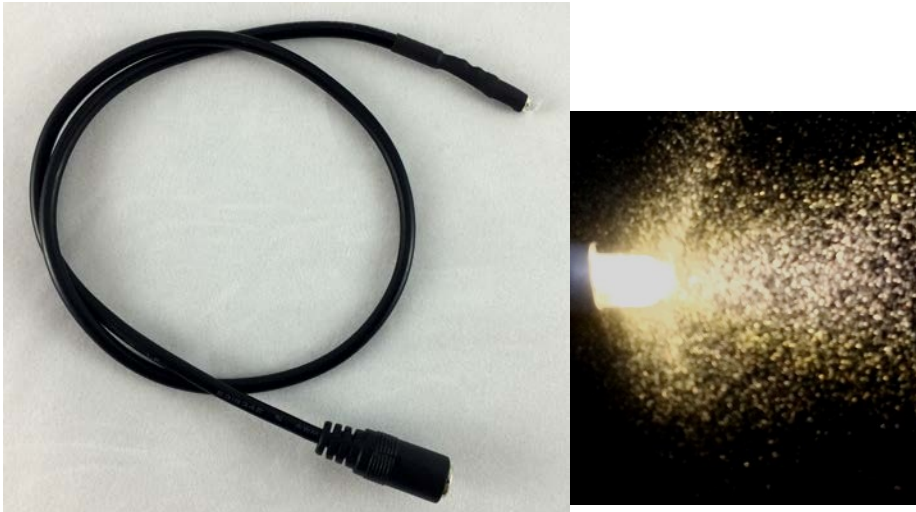

Characteristics

- 1) DC Barrel Connector female Jack accepts 2.1mm x 5.5mm plug with center positive.
- 2) Cable: PVC (black).
- 3) Volts DC (VDC): 9-12 nominal (continuous), Max 12.5
- 4) Current (ref.): 20ma @ 9 VDC, 28ma @ 12 VDC, 35ma Max.
- 5) Power (nominal): 0.18 watts at 9 VDC, 0.34 watts at 12 VDC, 0.44 watts Max.
- 6) Output: Warm White 3,200 Kelvin, 4 lumen ref.
- 7) Color Coordinates CIE1931: x=0.41/ y=0.37 Typ.
- 8) Length 20" Ref. (overall length) x Diameter 0.15" Ref. (LED)
- 9) Typical 9 volt battery operating time is greater than 12 hours.

Notes / Cautions

- 1) This lighting device is static sensitive, retain protective shipping bag for storage to protect from ESD (Electro Static Discharge) damage.
- 2) Intense light source, for eye safety do not look directly into the beam at close range.
- 3) Observe correct polarity when connecting power, damage may result from unintended reverse polarity.

Plug 2.1mm X 5.5mm



Mating plug example
(Not included, sold separately)

Prop and Scenery Lights, LLC
P/N: MEP-WW1 (Warm White)
Micro Effects Pigtail LED Light, LED DC
Barrel Connector Cable 20"
Rev-A (07/29/15)